

Signal and DC Common Mode Choke

CLP53




Description


- Common mode choke of small surface mount
- Operating temperature range: -40°C ~ +85°C
- RoHS compliant




Dimension [mm]

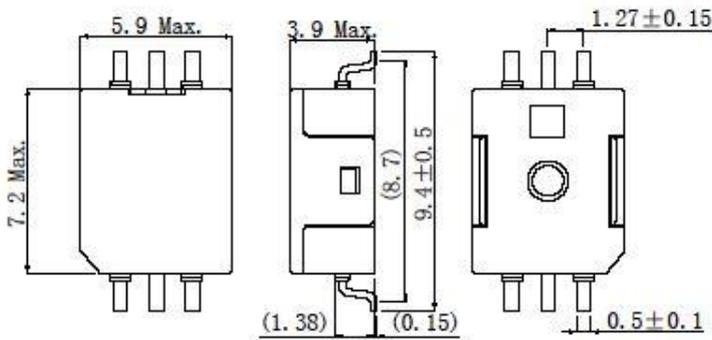

Schematics



Recommended land patterns [mm]

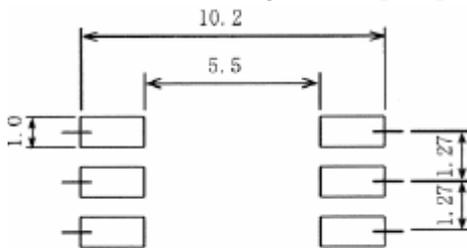

Specifications

Part No.	Impedance(Ω) @100MHz	D.C.R.(Ω) @20°C	Rated current
CLP53-PM7	Typ. 1,000 Ω	Typ. 160mΩ	500mA
CLP53-PM9	Typ. 900 Ω	Typ. 130m Ω	500mA
CLP53-PM11	Typ. 600 Ω	Typ. 100mΩ	500mA


Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

Signal and DC Common Mode Choke

CLP53



Impedance Characteristics

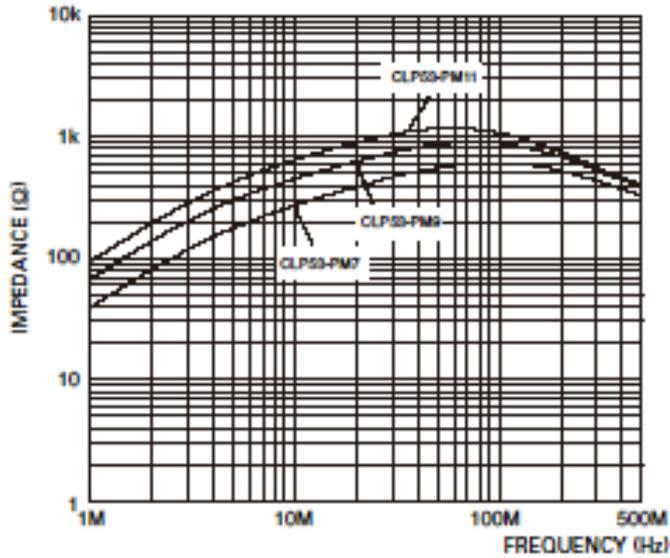

For sales office information, please [click here](#) to visit our website.

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.