

Common mode choke coil for DC lines CPFC0535B



Description


- Small size and large currents.
- Size: 5.3×6.2×H3.8 mm

Applications


- Common mode noise filter for broadband and communication equipment.
- Common mode noise reduction of DC line.




Dimension [mm]

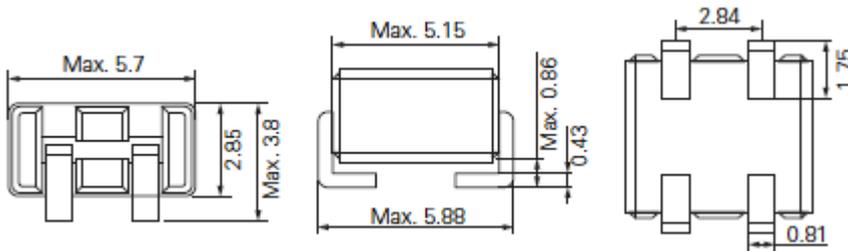

Reference Land pattern [mm]

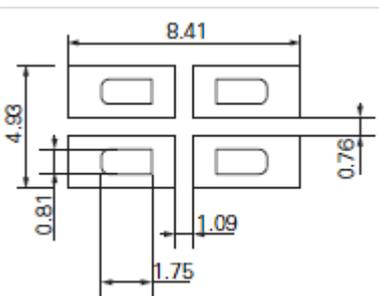

Schematics



Electrical Characteristics


Part No.	Impedance (2-3) (1-4)			D.C.R (Ω) (2-3) (1-4)at 20°C	Rated Current (A)
	100MHz, 0.14V	25.0MHz, 0.14V	300MHz, 0.14V		
PS15223	Min. 25.0 Ω (Typ. 33 Ω)	20.0 Ω (Ref.)	36.0 Ω (Ref.)	Max. 0.75mΩ	15.0A

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

Common mode choke coil for DC lines CPFC0535B



Impedance Characteristics / インピーダンス特性

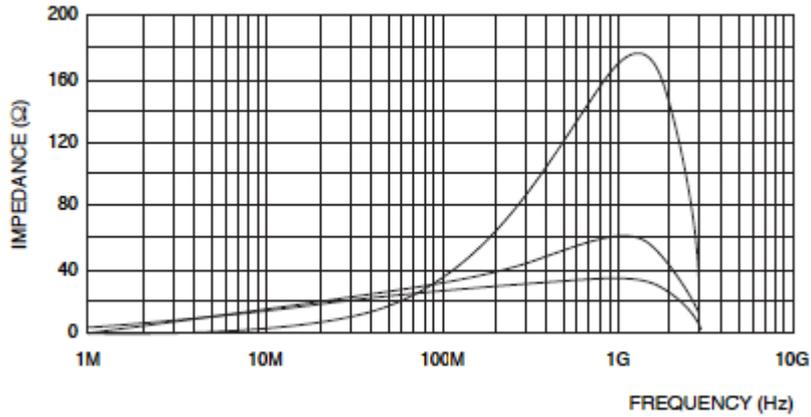

For sales office information, please [click here](#) to visit our website.

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

Common mode choke coil for DC lines CPFC0535B



Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.